

Pano

Slim Panel Luminaire

La luminaria montada en el techo SMD Square & Rectangular Slim de la serie Pano SMD es la solución ideal para los accesorios fluorescentes tradicionales de 4 x 20 vatios. Diseñados para una instalación rápida, los paneles se instalan fácilmente en falsos / techos contemporáneos, dando un aspecto fresco a los espacios comerciales para dar resultados iguales e impresionantes. Las preocupaciones sobre el mantenimiento o problemas de compatibilidad con los balastos existentes se eliminan con una vida útil de 40,000 horas y una nueva fuente de alimentación.

Perfecto para espacios comerciales como bancos, escuelas, oficinas, corredores generales, clínicas y hospitales.

The Pano Series SMD Square & Rectangular Slim ceiling mounted luminaire are the ideal solution for traditional 4 x 20 Watt fluorescent Fixtures . Designed for quick installation, the Panels easily install into False/ Contemporary ceilings bringing a fresh look to the commercial spaces to giving a equal and impressive results. Concerns about maintenance or compatibility issues with existing ballasts are eliminated with 40,000 hours life rating and a new power supply.

Perfect for Commercial Spaces like Banks, Schools , Offices , General Corridors , Clinics & Hospitals.



indoor

Pano

Slim Panel Luminaire




Pano 60



Pano 120

Product Information

- > Lamp Type
LED
- > Dimming Options
0~10 , DALI-EU
- > Nominal Operating Voltage
220V-240V / 50-60Hz
- > Control Type
Switch
- > Median useful life
L70B10 40,000 Hours
- > Materials
Extruded Aluminum Body +
PMMA LGP & Diffuser
- > Installation Type
Surface Recessed / Pendant
- > Ingress protection
Code Ip30 with
- > Mech. impact
Ik02
- > Power Factor
0.9+
- > Working Temperature
Ta : -15°C ~ +45°C
- > Protection Class
IEC Safety Class II



Frost

Model modelo	Power energía	Color temperature CCT temperatura del color	Luminous Flux lm flujo luminoso 4000K	Beam angle deg. Ángulo de haz N . NW .W
Pano 60	36	3000k, 4000k, 5700k,	3600	120°
	40		2940	120°
Pano 120	30	3000k, 4000k, 5700k,	4000	120°
	36		3000	118°
	40		3560	118°
	48		3921	118°
			4800	118°

indoor


Pano

Slim Panel Luminaire


Ordering Guide Sample *Ejemplo de la guía de pedido*

MO-WATT-ITL-CT-VA-OA-OB												
EXAMPLE : PANO60 36 SR 30 BA01 OA01 OB01												
MO	Model	WATT	ITL	Installation Type	CT	C.C.T	BA+	Beam Type BA	OA+	Control Mode	OB+	Voltage
Pano 60		36	SR	Surface recessed	27	2700K	01	120°	01	Switch	01	220VAC
		40	PN		30	3000K			02	DALI-EU		
Pano 120		30			40	4000K			03	0-10V		
		36			57	5700K						
		40										

Product Dimensions *Dimensión del producto*



Model / Watt <i>modelo / power</i>	Length A <i>longitud</i>	Height B <i>altura</i>	Width C <i>anchura</i>
Pano 60	600mm	11mm	600mm
Pano 120	1200mm	11mm	300mm

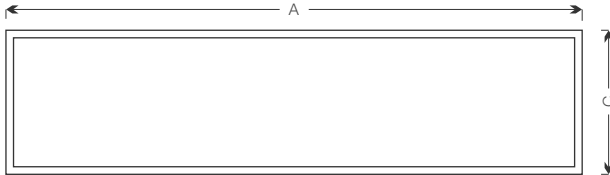

Planning Aid

** For Planning Aid , visit <https://www.avadalight.es/planning-aid/>

View Online

Pano, Category page: visit

<https://www.avadalight.es/interior-lighting/ceiling-luminaire/>

5 Years Warranty

As a globally leading luminaire manufacturer, AVADA Lighting provides a five-year warranty for its complete product range within all European Countries.

Avada Lighting is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. The right is reserved to change specifications without prior notification or public announcement. All goods supplied by the company are supplied subject to the company's General Conditions of Sale, a copy of which is available on request. All measurements are in millimetres and weights in kilograms unless otherwise stated.