

Rectán



Rectán is the top of the line track mounted luminaire with the most innovative and unique design and feel, Rectan is modern yet efficient light system for designers a way to enhance their project with unique and compatible way.

Lumen Output **3000lm~4600lm**

System Power **30,40W (Typical)**

Power **220V-240V**

Lifetime L70 **50,000 Hours**


Housing **Die-Cast Aluminium**

Installation **Track 2/3 wire**

CRI(optional) **80, 90**

Dimmable (Optional) **Dali,1-10V(Built-in),Triac**

Working Temperature **Ta : -25°C ~ +45°C**

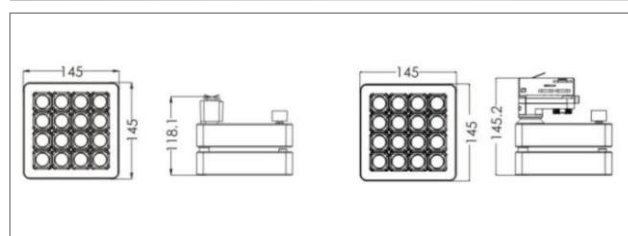

product reference	power(w)	CRT	CRI	luminous flux(lm)	beam angle	ref. + dim. (option)
RECTAN-TR2700308030	30	2700k	80	3000	15°.20.30°.45.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR2700309030	30	2700k	90	3000	15°.20.30°.45.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR3000308030	30	3000k	80	3150	15°.20.30°.45.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR3000309030	30	3000k	90	3150	15°.20.30°.45.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR4000308030	30	4000k	80	3300	15°.20.30°.45.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR4000309030	30	4000k	90	3300	15°.20.30°.45.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR2700408030	40	2700k	80	3300	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR2700409030	40	2700k	90	3300	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR3000408030	40	3000k	80	3500	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR3000409030	40	3000k	90	3500	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR4000408030	40	4000k	80	3700	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR4000409030	40	4000k	90	3700	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR4500408030	40	4500k	80	4900	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI
RECTAN-TR4500409030	40	4500k	90	4900	20°.30°.45°.60°.40°x20°.60°x10°	Triac,1-10V,DALI